PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : C22B 15/00 — A1

(11) International Publication Number: WO 00/70103

(43) International Publication Date: 23 November 2000 (23.11.00)

(21) International Application Number: PCT/FI00/00396

(22) International Filing Date: 4 May 2000 (04.05.00)

(30) Priority Data:
991110 14 May 1999 (14.05.99) FI

(71) Applicant *(for all designated States except US)*: OUTOKUMPU OYJ [FI/FI]; Riihitontuntie 7, FIN–02200 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: KOJO, Ilkka [FI/FI]; Malmen 140, FIN–02430 Masala (FI). KYTÖ, Markku [FI/FI]; Tornitaso 2B, FIN–02100 Espoo (FI).

(74) Agent: OUTOKUMPU OYJ; Patent Services, P.O. Box 27, FIN–02201 Espoo (FI).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD AND EQUIPMENT FOR SMELTING NON–FERROUS METAL SULPHIDES IN A SUSPENSION SMELTING FURNACE IN ORDER TO PRODUCE MATTE OF A HIGH NON–FERROUS METAL CONTENT AND DISPOSABLE SLAG

(57) Abstract

The present invention relates to a method and equipment, whereby matte with a high non–ferrous metal content and disposable slag are produced simultaneously in a suspension–smelting furnace from non–ferrous sulphide concentrate. According to the invention, a carbonaceous reducing agent is charged to the lower furnace of a suspension smelting furnace via tuyeres to the part of the furnace which has a reduced cross–sectional area.

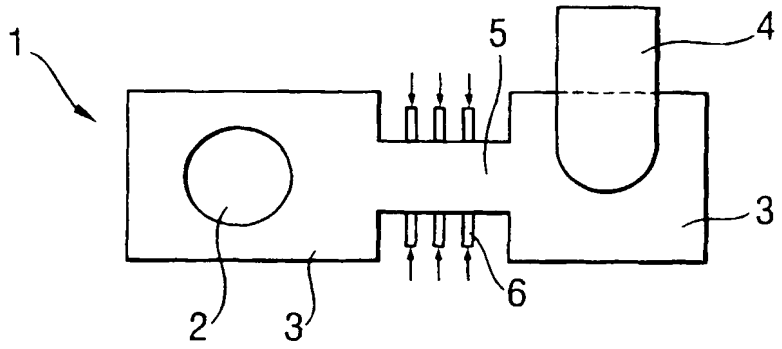

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		

METHOD AND EQUIPMENT FOR SMELTING NON-FERROUS METAL SULPHIDES IN A SUSPENSION SMELTING FURNACE IN ORDER TO PRODUCE MATTE OF A HIGH NON-FERROUS METAL CONTENT AND DISPOSABLE SLAG

The present invention relates to a method and equipment, whereby matte with a high non-ferrous metal content and disposable slag are produced simultaneously in a suspension smelting furnace from non-ferrous sulphide concentrate. According to the invention, a carbonaceous reducing agent is charged to the lower furnace of a suspension smelting furnace via tuyeres to a section of the furnace with a reduced cross-sectional area.

It is characteristic in suspension smelting that the final phase equilibrium between the slag and matte only arises during the slag reactions taking place in the lower furnace. In other words, the potentially imbalanced over- and under-oxidized compounds formed in the reaction shaft still react with each other in the slag phase, particularly in the primary discharge point of the shaft suspension under the reaction shaft, so that the massive slag and matte phase are almost in the composition defined by their thermodynamic composition. In addition to the previously mentioned equilibrium-determining copper already dissolved in the slag, copper-rich matte, undissoluble to the slag, remains in the slag as a mechanical suspension, which does not manage to settle in a realistic time.

It is known before that slag with a low copper content can be produced in a suspension smelting furnace such as flash smelting furnace, when fixed coke or some other carbonaceous substance is used in the reduction of slag and the copper oxidule dissolving therein and especially magnetite which increases the viscosity of the slag and slows down the separation of molten matte particles contained in the slag by settling.

In US patent 5,662,370 a method is described, in which it is essential that the carbon content of the carbonaceous material to be charged to the reaction shaft is at least 80%, that at least 65% of the material particles are under 100 μm and at least 25% between 44 -100 μm. Particle size is defined precisely, because, according to said patent, the reduction of magnetite with unburnt coke occurs under two mechanisms and particle size is of decisive significance with regard to said mechanisms. If the rough coke powder size is about 100 μm or greater, the particle size of the unburnt part is also great and for this reason coke remains floating on the slag surface and reactions are slow. When particle size is reduced, the powder coke enters the slag and thus comes into direct contact with the magnetite to be reduced, which accelerates the reaction rate.

In Japanese patent application 58-221241 a method is described, in which coke breeze or coke breeze together with pulverized coal are charged into the reaction shaft of a flash smelting furnace through a concentrate burner. The coke is fed into the furnace so that the entire surface of the melt in the lower furnace is evenly covered with the unburnt powder coke. According to the application, the degree of reduction of magnetite decreases when the grain size is ultra-fine, so grain size used is preferably from 44 μm to 1 mm. - The slag layer covered by unburnt coke, which remains on the molten slag bath decreases considerably the partial pressure of oxygen. The highly reducing atmosphere arising from the coke layer causes for example damages to the lining of the furnace.

In JP patent 90-24898 there is described a method, in which pulverized coke or coal with particle size of under 40 mm is fed into the flash smelting furnace to replace the oil used as an extra fuel and maintain the desired temperature in the furnace.

JP patent application 9-316562 applies to the same method as the previously mentioned US 5,662,370. The difference from the method of the US patent is that carbonaceous material is fed to the lower part of the reaction shaft of the flash smelting furnace, to prevent said carbonaceous material from burning before it reaches the slag and the magnetite to be reduced contained therein. The particle size of the carbonaceous material is essentially the same as the distribution described in the US patent.

A weakness of the previously described methods is that the reduction area is the same where slag material and non-ferrous metallic matte come to when they settle from the reaction shaft and separate from the gas phase in the lower furnace. However, in a suspension smelting furnace, fine grained material such as copper matte particles does also drift with the gas phase to the back of the furnace and uptake. When these smallest particles separate from the gas flow in the back of the furnace and settle to the surface of the slag phase, their settling in the slag phase is very slow due to just the small particle size. Because slag mainly is tapped from the back or side of the furnace, these particles do not manage to settle through the slag phase. Instead, they drift together with the slag to be tapped out of the furnace and add to the copper content of slag.

Another weakness in some of the previously described methods is the small particle size of the coke, in that these coke particles do not settle at all from the gas phase but continue with the gas phase to the uptake and from there on to a waste-heat boiler as a reducing agent. In the boiler the coke particles react and generate unnecessary energy in the wrong place, which may even limit total process capacity as the waste-heat boiler capacity diminishes.

One clear disadvantage of the previously described methods is that the reducing impact of the coke and then the minimum content of the slag are

directed in an uncontrolled manner throughout the lower furnace area including particularly the area underneath of the reaction shaft, which has an essential impact on the non-ferrous metal content of the matte produced. In other words, the massive coke layer which forms on the surface of the slag phase renders the process uncontrollable. Now in the method developed, it is possible to reduce the slag further without essentially affecting the metal content of the massive non-ferrous metallic matte such as copper or nickel matte produced in the process without disturbing the slag reactions in the shaft suspension.

In a method according to the present invention developed for non-ferrous metal production in a suspension-smelting furnace, the slag forming in a lower furnace is injected with pulverized coke or other carbonaceous reducing agent via tuyeres into an area, which does not disturb either the natural slag reactions of the suspension which discharges from a reaction shaft and the generation of matte. So the tuyere injection is either done in the area between the reaction shaft and the uptake, under the uptake or in a separate extension of the lower furnace located after the uptake. The difficulty of a tuyere injection in metallurgical processes is that its impact area is short depth-wise and in a conventional suspension smelting furnace effective impact would not be possible due to the width of the furnace. For this reason, according to the present invention, a throttle area with an essentially reduced cross-sectional area is incorporated into the furnace, where the tuyeres are located. It is essential that the slag-tapping hole is located so that the total amount of melt has to flow through this tuyere area, thereby reducing the slag. The reduction area precedes a settling area, where the matte and metal particles separated from the slag by reduction can settle. The essential features of the invention will become apparent in the attached patent claims.

It is also known before that the viscosity of slag in slag reduction decreases with lowering of ferric iron content which increases viscosity, wherein the settling of particles separated in reduction occurs more rapidly than in a normal suspension smelting. In addition, in the method of the present invention the flows caused by the injection achieve desired turbulence in the melt, so the small particles therein which settle slowly have an improved chance of joining each other or straight to the matte phase, which in turn makes the cleansing of slag from metal more effective.

The invention is described further in the attached diagrams, where:
Figures 1 and 2 present schematic cross-sections of the suspension smelting furnace, where an alternative offered by this invention has been applied by positioning tuyeres on the lower furnace between the reaction shaft and uptake and
Figures 3, 4, 5, 6 and 7 present likewise cross-sections of the suspension smelting furnace, in which the tuyeres have been placed after the uptake and an own settling area has formed to the lower furnace.

Figure 1 presents schematically a cross-section of a suspension smelting furnace 1, where a reaction shaft 2, a lower furnace 3 and an uptake 4 can also be seen. In the area between the reaction shaft and uptake in the lower furnace an essentially right-angled throttle point 5 is formed, where the cross-sectional area of the furnace is decreased. A reducing agent such as coke is charged through a tuyere 6 into this neck.

The alternative presented in Figure 2 is essentially the same as in Figure 1, but throttle point 5 is formed more smoothly than in the previous case. In both Figures 1 and 2, the tapping holes for matte and slag are located normally at the back of the lower furnace (not shown in diagram). The settling area of the lower furnace following the throttle point is in both cases equal to the width of the primary lower furnace.

Figures 3, 4, 5, 6 and 7 present an alternative where the neck point is formed in the area of the lower furnace after the uptake. In the case of Figure 3, the lower furnace is throttled on opposite sides and tuyeres 6 have been located on the throttle point 5. After the throttle point, there is an extension part 7, which acts as a settling area, as described earlier. The furnace structure in Figure 4 is otherwise the same as Figure 3, but the furnace has been throttled on the other side only. In the solution presented in Figure 5, the lower furnace does not have the extended settling area, but the end of the furnace is in cross-sectional area essentially the size of the throttle point. Figures 6 and 7 show that the settling area can also be formed other than in a right-angled shape. In Figures 1 - 6, the tuyeres are positioned perpendicular to the melt, but in Figure 7 the tuyeres are positioned in reverse at an angle to the melt flow. The tapping holes for matte and slag presented in Figures 3 – 7 are located at the very back of the settling area, although they are not shown in more detail.

PATENT CLAIMS

1. A method for smelting non-ferrous metal sulphides in a suspension smelting furnace, in which matte is produced with a high non-ferrous metal content and slag, which is reduced with the aid of carbonaceous material in a lower furnace for disposal, **characterized in** that the slag is reduced in a throttle point (5) formed in the lower furnace, in which throttle point the cross-sectional area of said furnace is decreased and into which a reducing agent is charged via tuyeres (6) on the slag layer.

2. A method according to claim 1, **characterized in** that the entire melt flows through the throttle point.

3. A method according to claim 1, **characterized in** that the reduction point is in the lower furnace in the area between the reaction shaft and uptake.

4. A method according to claim 1, **characterized in** that the reduction point is in the area of the lower furnace after the uptake.

5. A method according to claim 1, **characterized in** that the reduced slag is channelled to a settling area (7) before being discharged from the furnace.

6. Equipment for smelting non-ferrous metal sulphides in a suspension smelting furnace, producing matte with a high non-ferrous metal content and slag which is reduced for disposal, **characterized in** that a lower furnace is furnished with a throttle point (5) and tuyeres (6) placed therein for a reducing agent.

7. Equipment according to claim 6, **characterized in** that the throttle point is formed to an area of the lower furnace between the reaction shaft and

uptake.

8. Equipment according to claim 6, **characterized in** that the throttle point is formed to an area of the lower furnace after the uptake.

9. Equipment according to claim 6, **characterized in** that the lower furnace is furnished with a settling area after the throttle point.

10. Equipment according to claim 9, **characterized in** that the slag-tapping hole is located in said settling area.

11. Equipment according to claim 9, **characterized in** that the width of the settling area is equal to that of the lower furnace.

12. Equipment according to claim 9, **characterized in** that the width of the settling area is equal to that of the throttle point.

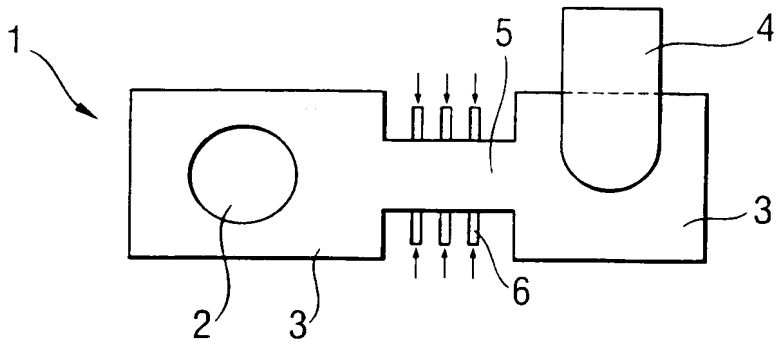


Fig. 1

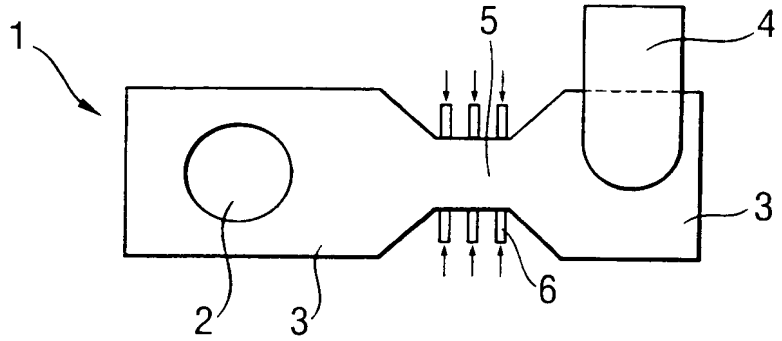


Fig. 2

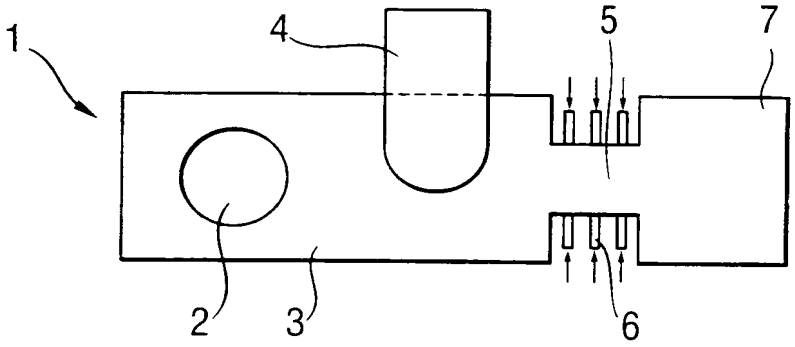


Fig. 3

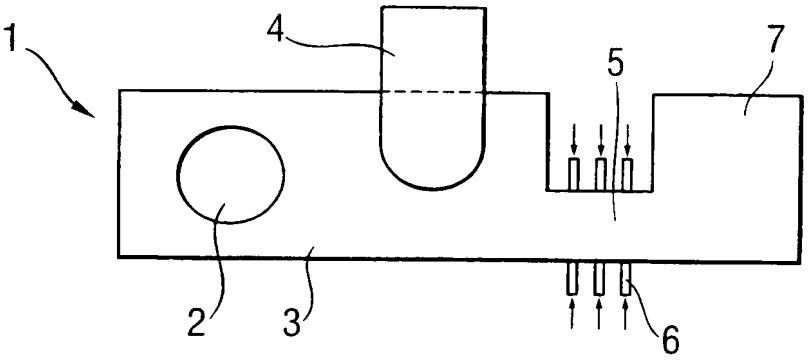


Fig. 4

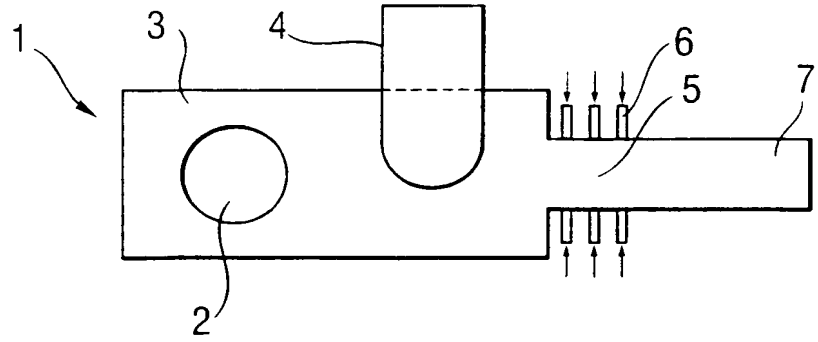


Fig. 5

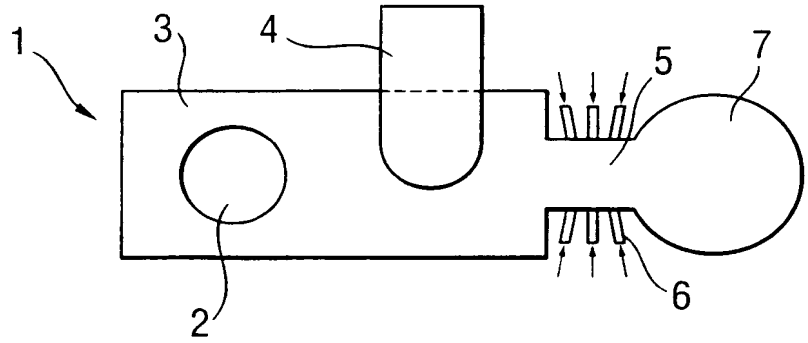


Fig. 6

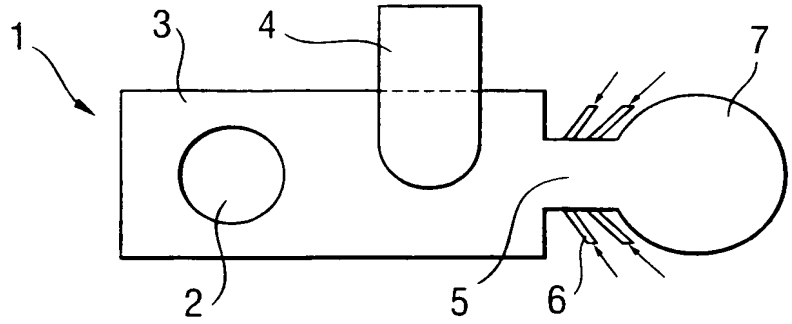


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI 00/00396

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: C22B 15/00
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: C22B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EDOC,WPI,PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5662730 A (SUSUMU AKAGI ET AL), 2 Sept 1997 (02.09.97), figure 11, abstract ---	1-12
A	US 4857104 A (GRIGORI S. VICTOROVICH ET AL), 15 August 1989 (15.08.89), abstract ---	1-12
A	US 5458672 A (MAYNARD G. DING), 17 October 1995 (17.10.95), abstract --- --------	1-12

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" erlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
12 Sept 2000	15 -09- 2000
Name and mailing address of the ISA Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Lars Ekeberg/MP Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

08/05/00

International application No.
PCT/FI 00/00396

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5662730 A	02/09/97	JP 8209261 A	13/08/96
US 4857104 A	15/08/89	NONE	
US 5458672 A	17/10/95	AU 691901 B	28/05/98
		AU 2049795 A	14/12/95
		BR 9502660 A	05/08/97
		CA 2150969 A	07/12/95
		PL 176959 B	31/08/99
		PL 308942 A	11/12/95